


**TYPE 1 CROSS RECESS
PAN HEAD
TYPE "F" TCS**

XXXXPPFZ
APRIL, 2014
REV 00
PAGE 1 of 1

Nominal Screw Length	Tolerance On Screw Length
Up To & Including 3/4"	-0.03
Over 3/4" to 1-1/2" Inclusive	-0.05
Over 1-1/2"	-0.06

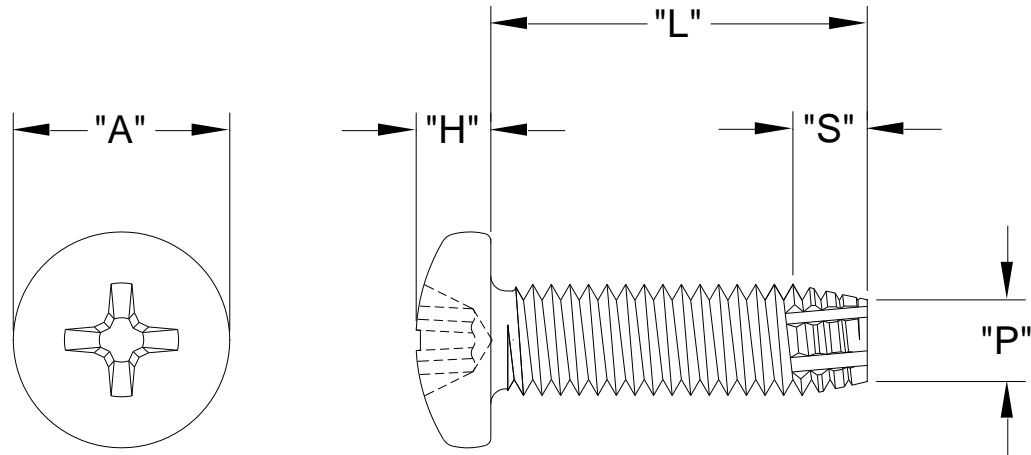

Nominal Screw Size	Basic Screw Size	"D"		"p"		"s"				Determinant For Point Taper Length	"A"		"H"		Driver Size	Recess Penetration Gaging Depth	
		Major Diameter		Point Diameter		Short Screws		Long Screws			Head Diameter		Head Height			Max.	Min.
		Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.		Max.	Min.	Max.	Min.			
#2 - 56	0.086	0.0860	0.0813	0.068	0.061	0.062	0.045	0.080	0.062	5/32	0.167	0.155	0.062	0.053	1	0.052	0.034
#4 - 40	0.112	0.1120	0.1061	0.087	0.078	0.088	0.062	0.112	0.088	7/32	0.219	0.205	0.080	0.070	1	0.071	0.053
#6 - 32	0.138	0.1380	0.1312	0.107	0.096	0.109	0.078	0.141	0.109	1/4	0.270	0.256	0.097	0.087	2	0.080	0.055
#8 - 32	0.164	0.1640	0.1571	0.132	0.122	0.109	0.078	0.141	0.109	1/4	0.322	0.306	0.115	0.105	2	0.097	0.071
#10 - 24	0.190	0.1900	0.1818	0.148	0.135	0.146	0.104	0.188	0.146	11/32	0.373	0.357	0.133	0.122	2	0.113	0.089
#10 - 32		0.1900	0.1831	0.158	0.148	0.109	0.078	0.141	0.109	1/4							
#12 - 24	0.216	0.2160	0.2078	0.174	0.161	0.146	0.104	0.188	0.146	11/32	0.425	0.407	0.151	0.139	3	0.124	0.098
1/4 - 20	0.250	0.2500	0.2408	0.200	0.184	0.175	0.125	0.225	0.175	13/32	0.492	0.473	0.175	0.162	3	0.144	0.118
5/16 - 18	0.313	0.3125	0.3026	0.257	0.239	0.194	0.139	0.250	0.194	15/32	0.615	0.594	0.218	0.203	4	0.173	0.149
3/8 - 16	0.375	0.3750	0.3643	0.312	0.293	0.219	0.156	0.281	0.219	1/2	0.740	0.716	0.264	0.244	4	0.213	0.190

Standard: ASME B18.6.3
 Material: Carbon Steel,
 Heat Treat: Case Hardened Rc45 Min.
 Finish: Commercial Zinc, Bake & ROHS Compliant Clear Chromate
 Per ASTM F1941 Code Fe/Zn 3A

Common Uses:
 Most Common Head Style; Higher Head Height For Increased Strength; Used In sheet metal ≥60% of screw dia.; Painted extruded sheet metal; Paint clearing in tapped holes.