


SLOTTED INDENTED HEX WASHER HEAD TRILOBULAR 48-2 T.F.S.

XXXXSHWPZ
APRIL, 2014
REV 00
PAGE 1 of 1

Nominal Screw Length	Tolerance On Screw Length
Up To & Including 3/4"	± .030
Over 3/4"	± .050

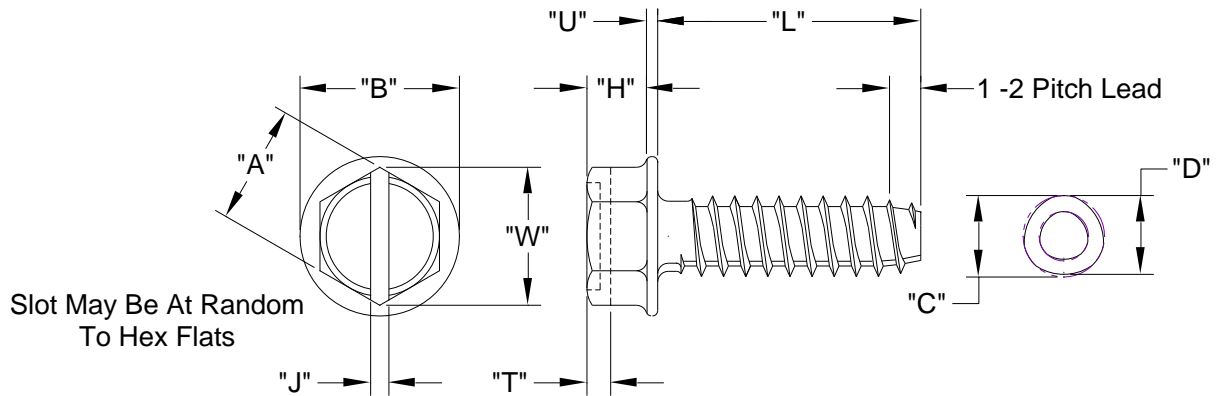

Nominal Screw Size	"C"		"D"		"A"		"W"	"H"		"B"		"U"		"J"		"T"	
	Circumscribing Circle		Major Diameter		Width Across Flats		Width Across Corners	Head Height		Washer Diameter		Washer Thickness		Slot Width		Slot Depth	
	Max.	Min.	Max.	Min.	Max.	Min.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
#6-19	0.147	0.141	0.143	0.137	0.250	0.244	0.272	0.093	0.080	0.328	0.302	0.025	0.015	0.048	0.039	0.053	0.033
#8-16	0.185	0.179	0.179	0.173	0.250	0.244	0.272	0.110	0.096	0.348	0.322	0.031	0.019	0.054	0.045	0.074	0.052
#10-14	0.212	0.206	0.208	0.202	0.312	0.305	0.340	0.120	0.105	0.414	0.384	0.031	0.019	0.060	0.050	0.080	0.057

<p>Head Standard: ASME B18.6.3 Material: Steel Case Hardened Surface Hardness: Rc45 Min Finish: Commercial Zinc, Bake, ROHS Compliant Clear Chromate, Wax Per ASTM F1941 Code Fe/Zn 3A</p>	<p>COMMON USES: Plastics Less Than 800,000 psi Flexural Modulus</p>
--	--